

FIG. 1



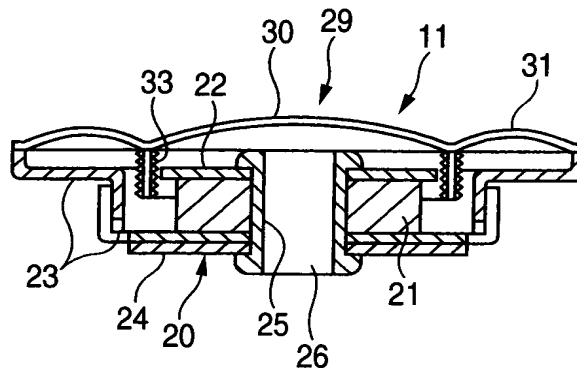


FIG. 2

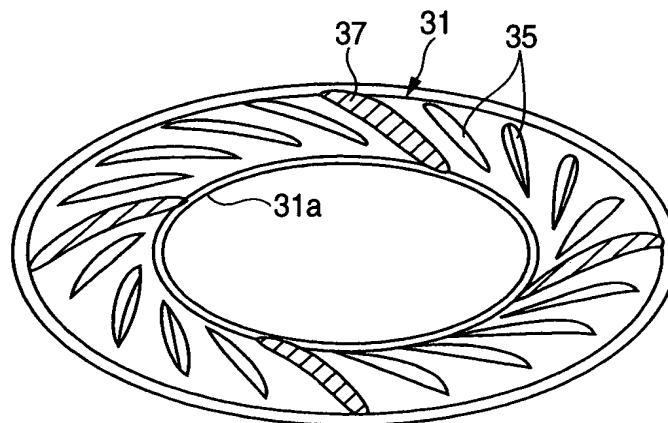


2/5

FIG. 3

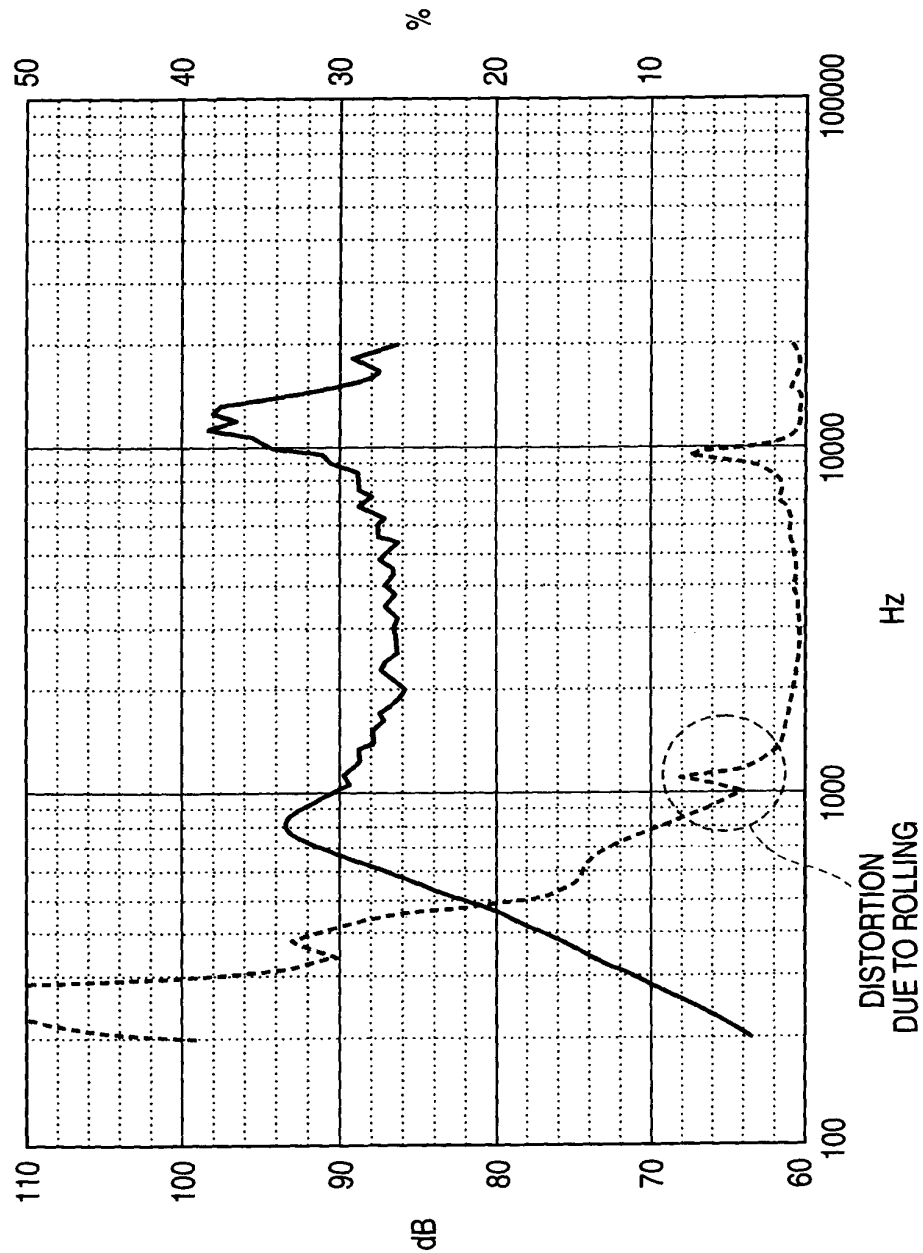

3/5

FIG. 4

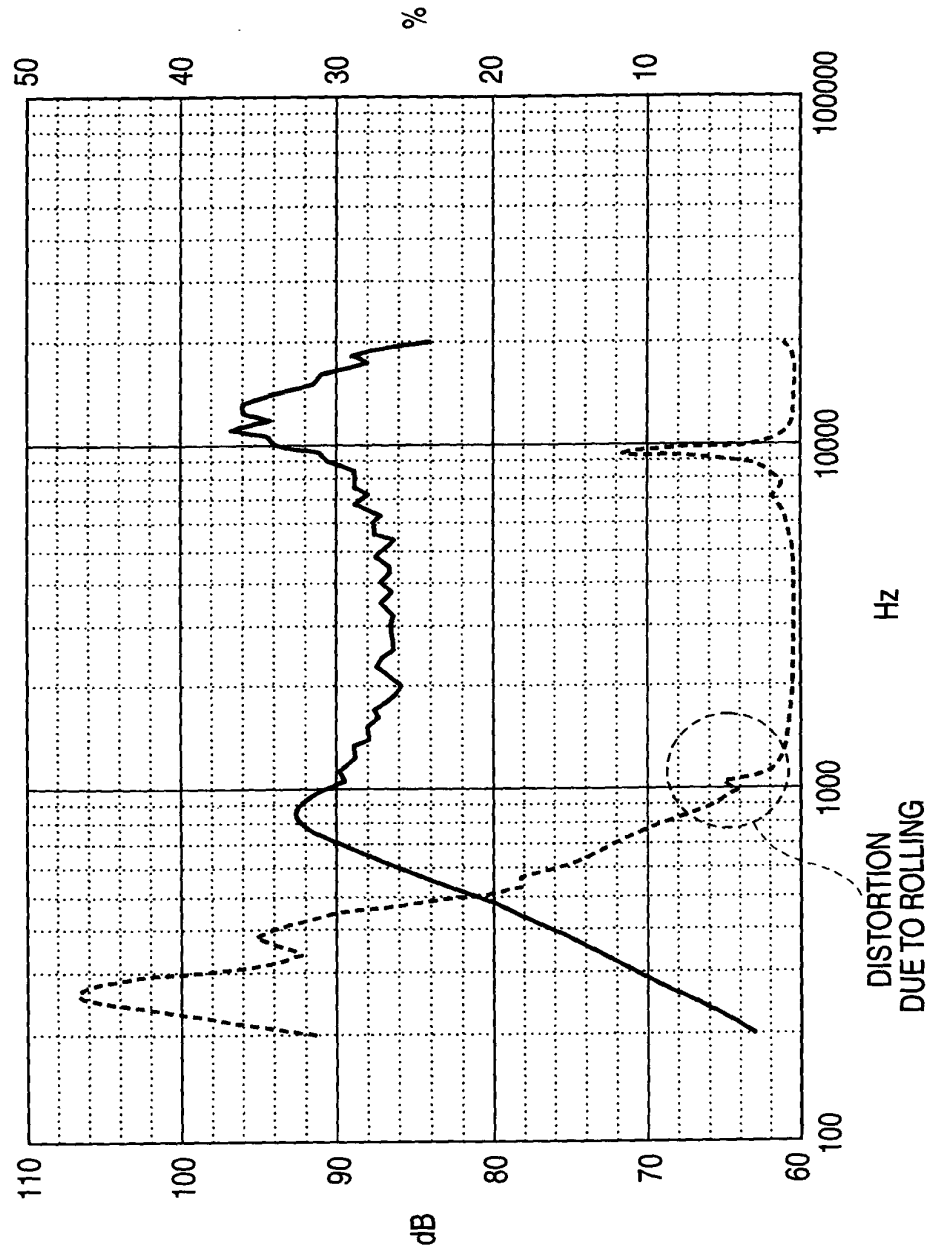

4/5

FIG. 5

	CONVENTIONAL EXAMPLE	EMBODIMENT
S01* (AVERAGE OF 2, 2.5, 3, 4kHz)	86.81dB	86.71dB
S02* (AT 1kHz)	91.26dB	91.52dB
f ₀	780.8dB	815.3dB
THD1* (700-1kHz)	12.28dB	11.74dB
THD2* (1-2kHz)	8.15dB	4.94dB
THD3* (5-15kHz)	7.15dB	11.34dB

* MEASUREMENT CONDITIONS: JISBOX, INPUT
0.1W, MICROPHONE DISTANCE 10cm

* TDH2: DISTORTION DUE TO ROLLING

5/5

FIG. 6

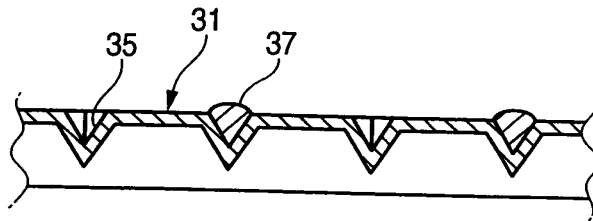


FIG. 7

